




lineview

A unique technology for the accurate measurement of flushes and gaps



- ➔ The Lineview is directly used on-site
- ➔ The easiest way to measure gap and flush
- ➔ Ergonomic : only 4 control buttons – perfect fit and comfort
- ➔ Autonomous, wireless, light weight : ready for any kind of inspection
- ➔ Easy : fast handling – very short training – no preliminary adjustment
- ➔ Gaps and flushes are automatically calculated within a few seconds – no extra computer necessary
- ➔ Reliable, repeatable and operator independent
- ➔ Safe : laser class 2, compatible with mass market regulations
- ➔ Low cost : inexpensive at purchase and in operation

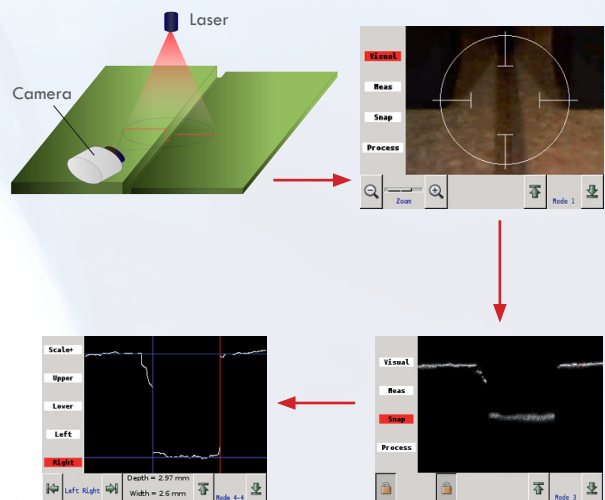

Measurement range :

- 0.05 mm < Depth < 5.5 mm
- For 0.05 mm < Depth < 0.3 mm, accuracy = ± 0.03 mm
- For 0.3 mm < Depth < 5.5 mm, accuracy = $\pm 10\%$

- 0.1 mm < Width < 6.5 mm

Weight : 1.7 kg

External USB port for data saving and reporting

Autonomy : typically 6 h at 25°C

➔ For the accurate measurement of scratches, the dedicated tool is : **scratchview**